


Australian and  
New Zealand Market

# 22 ways



to improve motor  
efficiency and prolong  
lifespan.

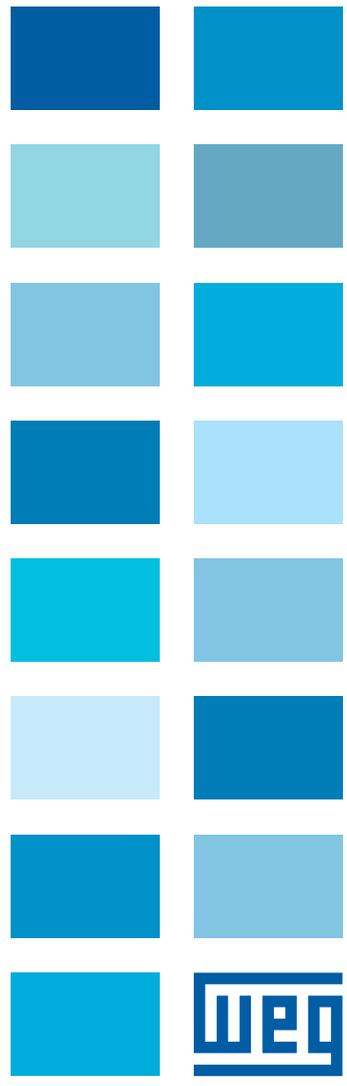

# At WEG we care about reducing carbon footprint and cutting costs with the W22.


As part of our commitment to you the customer & Industry we see with the release of our new range of high efficiency electric motors 22 ways to improve your motor performance, maintenance & operating costs & in turn reduce your carbon footprint.

Today, electric motors account for as much as 66% of industry's energy usage. Yet a huge amount of this energy is wasted, as organisations use solutions which are poorly designed, or inappropriate for their application. By reducing this wastage, companies not only help the environment, but also cut their costs and improve profitability.

At WEG, we are committed to providing solutions designed to help industry achieve these goals. And one of these solutions is our revolutionary W22 range of three-phase induction motors, designed to offer not only significantly lower energy consumption, but lower noise and vibration, higher reliability, easier maintenance and lower cost of ownership.

Consisting of two products, each designed to exceed the requirements of the MEPS Minimum and Minimum High Efficiency Levels, the WEG W22 range can reduce energy losses by between 10% and 40% compared with other typical motors. It's an extremely effective way to reduce your carbon footprint, as well as your energy costs. But its amazing energy efficiency isn't the only feature of the W22 that will save you money – far from it. Here, we describe 22 features of the product which differentiate it from other motors of its type and which will deliver significant savings and a fast return on investment.



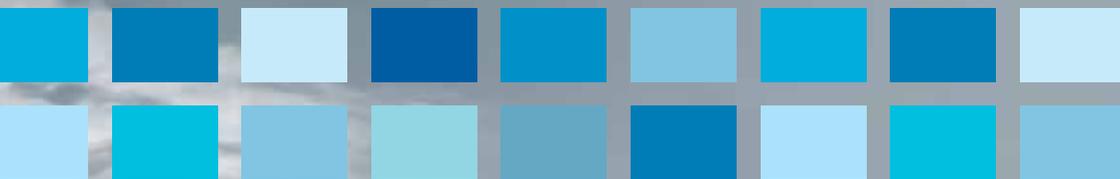


## 1. Maximum heat dissipation through extended frame area.

One of the main functions of an electric motor frame is to provide mechanical protection to the winding. It also provides the interface for installation through feet or flange.

The motor frame plays a crucial role in its thermal performance because it is responsible for transferring the heat generated inside the motor out to the frame surface where air blown by the fan will promote heat dissipation.

The W22 frame concept takes heat dissipation very seriously with eyebolts positioned in such a way that they do not block any airflow through the fins and also through the position of the terminal box which is placed towards the front of the frame. The quantity and distribution of the fins also have great impact in heat dissipation performance.

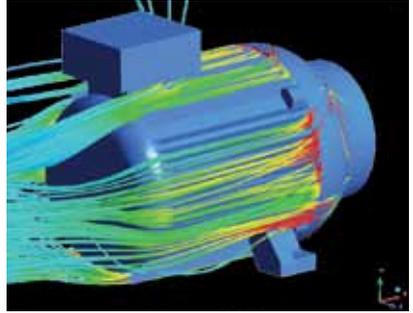


### Efficiency and Reliability Tip:

Respect the minimum gap between any wall positioned near the back of the fan cover to allow air intake. Keep motor surroundings clean and periodically check for any air blockage that can reduce the cooling system performance. Remember that the cooler a motor runs, the longer it will last.

## 2. Solid integrated feet for increased mechanical rigidity and easier installation.

When converting electrical energy into mechanical the motor requires supporting points where the mechanical thrust, proportional to the demanded load torque, will be applied to the base. These supporting points are the motor feet. This said we can conclude that stronger feet guarantee reliable operation, mainly in heavy duty applications, for example, crushers.

The W22 design integrates the sides of the front and rear feet for higher mechanical stiffness. They are solid for a better distribution of the mechanical thrust imposed by the load.

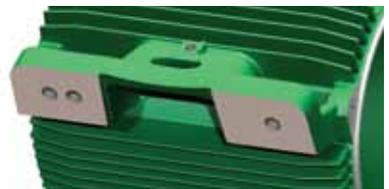

### Efficiency and Reliability Tip:


As a manufacturer, we make all efforts to increase mechanical stiffness of our products. Remember that feet are the motor interface with the base, which means that the base must be level and flat in order to guarantee less vibration and safer operation.



### 3. Flat surfaces distributed in NDE (2 in the frame) and DE (two in the endshield and one in the frame) for vibration monitoring.

The IEC 60034-14 defines two vibration grades, A and B, and it classifies a motor by size with vibration speed limits the motor must respect. These limits consider an uncoupled motor which means that at load conditions the set will have its own vibration level. The vibration level during operation depends on imperfect alignment between motor and load and on remaining unbalanced masses of motor and load.

Periodical monitoring of vibration levels gives a good indication of bearing conditions and overall application behaviour. A bearing failure often leads to a locked rotor condition which can cause the motor winding to burn out. With this in mind, the W22 range has as a standard feature, flat surfaces for vibration monitoring: two in the rear part of the frame, displaced 90° from each other and three in the drive end side: two in the endshield with another one in the front part of the frame.

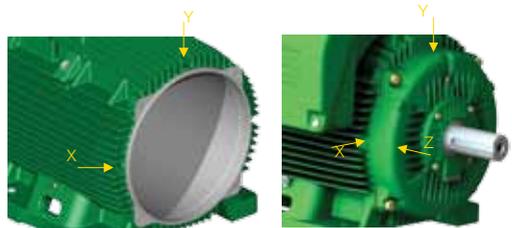

#### Efficiency and Reliability Tip:

Periodical analysis of bearing vibration can help to identify several kinds of dysfunction, not exclusively to the motor, but to the entire application. Keeping records of main processes and machine vibration behaviour will provide peace of mind to maintenance managers and help minimise production breakdown.


#### 4. Flexibility of terminal box mounting positions enabling reduced inventory and quicker modification.

Many companies map their main processes and identify the machines that are essential to keep those processes running. Most keep spare motors in stock as replacements should a breakdown occur, thus avoiding compromising their production.

Distributors may also stock motors with different terminal box configurations to suit specific customers, or adapt their stock by stripping down and reassembling motors. Both situations mean investing money, labour and warehouse space.

The W22 design allows fast modification leading to reduced stock demands and time to change the terminal box mounting position. A right hand side terminal box motor can be changed to a left hand side terminal box motor by just rotating the adaptor device.

It can also be modified into a top mounted terminal box by removing the adaptor device and adjusting the length of leads. Similarly, a motor with a top mounted terminal box can be modified into a side mounted terminal box by using a kit available from WEG.

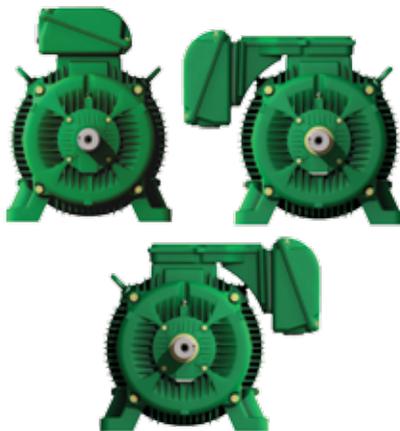

##### Efficiency and Reliability Tip:

The terminal box on the W22 range can be rotated in 90° increments to suit supply cable connection orientated to the front, rear or either side of the motor.

#### 5. Reduced noise pressure levels: limited to 80dB(A) at 1m from the motor for bidirectional 50Hz DOL motors (including two poles).

Health and safety regulations push for reduced noise levels aiming at offering better conditions for operators in the industry.

With W22 motors, the cooling system was designed for optimum balance of airflow and noise level. The fan provides greater amounts of air to cool the motor and the fan cover with its aerodynamic outline is designed to avoid recirculation of air (loss of performance) and to better direct the airflow over the motor fins.

As a result, all our 50Hz range, including two pole machines, is limited to 80dB(A) at 1m from the motor without compromising flexibility: all fans are bidirectional.

##### Efficiency and Reliability Tip:


Enquire at WEG about the availability of even lower noise level requirements.

## 6. Reduced operating temperatures through optimised cooling system (fan, fan cover and frame) designs.

An electric machine's lifespan is governed by its insulating material operational hours. The ageing of the insulating material is directly proportional to its operating temperature.

The cooling system of the W22 range, composed of fan, fan cover and motor frame is optimised providing outstanding heat dissipation. This allows for reduced

operating temperatures that do not push the insulation material to its limits. It also eliminates any hotspots by providing a uniform temperature distribution throughout the frame.

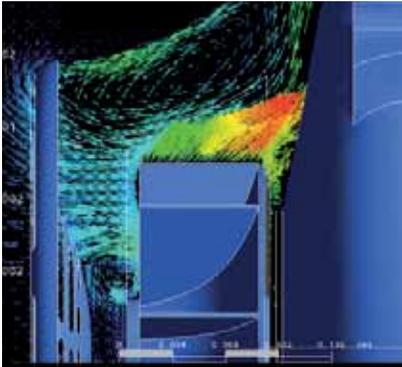

### Efficiency and Reliability Tip:

Motors driven by Variable Speed Drives (VSD) will have a higher temperature rise due to the PWM wave-form imposed on the motor winding. Whilst VSD operation enables a significant increase in a processes performance in terms of improved efficiency and lower operating costs, the higher temperature rise combined with the voltage spikes from the switching frequency will contribute to shorten winding life-time. The insulating material of the W22 allows for VSD operation minimising impacts in the winding. See WISE chapter for further details on VSD operation.

## 7. Reliability of fan cover: withstands IK08 impact test for extra mechanical protection.

One way to verify motor suitability for harsh, tough applications is by checking its mechanical envelope against impacts. The EN 50102 – Degree of protection provided by enclosures for electrical equipment against external mechanical impacts (IK code) ranks

motor enclosures by specifying in Joules a scale which a motor must withstand.

W22 motors are fully constructed in cast iron, the industrial preference for reliability in tough ambient applications.



### Efficiency and Reliability Tip:

The correct dimensioning of the motor must consider the application severity and the surrounding environment. Contact WEG specialists for advice on sizing and features a motor must have to match your application.



## 8. Oversized terminal box for easier and safer connection of mains and accessories.

The terminal box is the main interface of the electric motor with maintenance personnel. Large internal volume will provide easy access and better ergonomics during installation and maintenance operations.

W22 motors have a diagonally split oversized terminal box that provides optimal conditions for operators to access main and accessories terminals.



### Efficiency and Reliability Tip:

Motor must be disconnected from the power source during any intervention. Special attention should be taken with space heater connections that may be powered on, and with one phase if it is being used as a heating element.

## 9. New connector for fast accessories assembly.

For continuous monitoring, alarm and trip settings or to avoid condensation inside the motor, several types of accessories may be used aiming at assuring safer and longer operating hours.

The W22 range introduces a new connector configuration that does not require bolts to secure the terminals. The terminals are firmly assembled assuring reliable operation. Furthermore this connector can easily accommodate additional modules.



### Efficiency and Reliability Tip:

Always select the accessories that best suit your application. For instance, for continuous temperature monitoring, RTDs can be chosen. For ambient with constant presence of moisture, higher than 95%, space heaters are advisable and so forth. Please contact WEG for more information.

## 10. Connection reliability: terminal block design prevents cable rotation assuring extra protection.

Terminal blocks are commonly used to allow simple and fast maintenance procedures. But they also play an important role by providing safe and reliable connections for motor terminals.

The terminal block used in W22 motors has walls that prevent cable rotation assuring extra protection against accidental contact between terminals.

### Efficiency and Reliability Tip:

W22 terminal block provides larger contact area between power supply cables and motor terminals. Adequate tightening torques will guarantee safe and reliable operation.



## 11. Electrically insulated bearing hub: less replacement required compared to insulated bearings.

Large motors may present induced shaft currents due to the unbalanced waveform and high frequency components of the power supply. Motors driven by frequency converters may also experience electric current circulation through the bearings as a result of a Common Mode voltage effect. The Common Mode voltage is a high frequency electric potential relative to a common reference value (usually the DC link) present due to the inverter topology that makes the vector sum of voltages at any time different to zero. Practical experience shows that higher switching frequency tends to increase Common Mode voltage/current.

To avoid bearing circulating currents it is generally accepted to isolate one of the machine's bearings and to short circuit the shaft and frame in the other bearing. Usually an insulated bearing and a grounding brush are used for this function. Insulated bearings are expensive and are prone to wear which eventually requires replacement.

W22 motors can be fitted with a non-drive endshield where the hub is insulated. This component does not wear and guarantees longer operating hours.

### Efficiency and Reliability Tip:

Although available from 225S/M upwards, WEG recommends electrically insulated bearings from frame size 280S/M inclusive and up. Always follow WEG VSD guidelines for safer and longer operation. Go to [www.weg.net](http://www.weg.net) and download our Technical Guide – Induction motors fed by PWM frequency converters for further information.

## 12. Drive endshield design promotes excellent heat dissipation via optimised fin positioning and greater bearing hub exposure.

The endshields are fundamental elements to the motor so that generated torque is transmitted to the load efficiently and reliably. The endshield design must also consider the dimensional characteristics of the mechanical interface surfaces and the heat dissipation.

In the W22 range the drive endshield is designed with the use of Finite Element Analysis software resulting in a stronger design and exposing the bearings to a larger heat dissipation area. Additionally the fins of the drive endshield are located at the point of highest heat concentration which results in the reduction of bearing temperatures.

### Efficiency and Reliability Tip:

During maintenance procedures, always lubricate the bearings following the guidelines showing the type and amount of grease described on the motor nameplate. Excess or lack of grease can lead to a higher bearing temperature rise, reducing the expected bearing lifetime.





### 13. Extended lubrication intervals – less intervention leads to less maintenance costs.

The lubrication interval is a function of motor mounting (horizontal or vertical), rated speed, bearing size, type of grease and temperature rise.

In the W22 design, extended lubrication intervals are reached mainly due to the reduced bearing temperature rise. The lubrication intervals are up to 26% higher compared to the W21 design, which means less intervention for lubrication. As any intervention relies on personnel and equipment, the less the equipment requires maintenance, the less is the total cost of ownership.

#### Efficiency and Reliability Tip:

As previously stated, respect the nameplate information when lubricating the motor. Do not mix grease types, even if they use the same elements. If another grease will be used in the application, contact WEG or a Distributor and enquire about lubrication intervals and the amount of grease.



#### 14. Efficient lubrication system – grease inlet and outlet channels developed to improve the grease passages to and from the motor bearings.

After installation and running, AC induction motors do not require many interventions. Instead, periodical vibration checks are recommended to evaluate overall application conditions (for further information on vibration monitoring, see number 3) and to strictly follow bearing lubrication schedules. Lubrication plays an important role as it is the single maintenance point to guarantee safe and reliable operation.

In the W22 design the lubrication system received special attention in terms of the grease path in the endshield to the bearing, from the bearing to the outside of the motor and also the bearing caps.



##### Efficiency and Reliability Tip:

As an optional feature, a grease outlet pipe can be supplied to be fitted in the non-drive endshield. This pipe guides the grease out of the fan cover. It is recommended to keep the fan cover interior clean.



**15. New WSeal® shaft sealing – higher protection against contaminants through a W-Ring (double lipped V-Ring) plus a metallic cap. This set simulates the effect of a labyrinth taconite.\***

By precisely following the bearing maintenance schedule and guidelines for grease, and lubricating intervals, you will guarantee longer lifetime. This is essential if bearing contaminants, such as liquids and dusts, are to be avoided. Additionally the protection against external contaminants must be suitable for the environment where the motor is installed.

The W22 range introduces the most recent development in shaft sealing: the WSeal®. The WSeal® is composed of a double-lipped V-Ring, or W-Ring plus a metallic cap. The W-Ring receives grease and the metallic cap is fitted. This set simulates the effect of a labyrinth taconite.



**Efficiency and Reliability Tip:**

Proper dimensioning of a product consists on defining not only the kW rating and speed, but also analysing the overall operational and environmental conditions in which the motor will be applied. This analysis should highlight conditions, accessories and requirements the motor must comply with. Not sure about the right motor for your application? Enquire at the nearest WEG office.

## 16. Earth terminals on both sides of the frame providing flexibility during installation.

The IEC 60034-1 Rotating electrical machines – Part 1: Rating and Performance defines that machines shall be provided with an earthing terminal or another device to permit the connection of a protective conductor or an earthing conductor.

In the W22 range, one earthing terminal is placed inside the terminal box, following the IEC 60034-1 recommendation, with a further second placed on either side of the motor frame. This exceeds the IEC 60034-1 requirements that define earthing terminals on the frame for outputs greater than 100kW.


### Efficiency and Reliability Tip:

When using the flexibility of a terminal box mounting position you can also rely on the earthing terminal position, flexibility to be in-line with the IEC standard that defines that, 'the earthing conductor shall be situated in the vicinity of the terminals for the line conductors'.

## 17. New drain plug: from an IP55 drain to an IP66 by changing drain position.

Industrial motors are usually fitted with drain holes and drain plugs to avoid condensation of water inside the motor. This is due to the fact that when the motor cools down it tends to suck external air into the machine. Depending on the ambient relative humidity, moistured air may reach the interior area of frame. This moisture will eventually condense so the motor design should have means to allow this water to be drained out of the frame.

The W22 line motors are supplied with drain holes for draining the condensed water from inside the motor. The position of these drain holes ensures efficient condensed water draining from the motor enclosure. The drain holes are fitted with new rubber plugs that allow continuous condensed water draining from the motor (drain plug at open position IP55) and depending on the motor application, the drain plug can be closed to ensure the degree of protection IP66 to the drain region (other parts of the motor will require different features to guarantee this degree of protection).

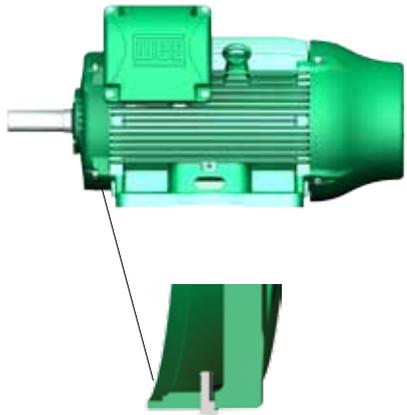

### Efficiency and Reliability Tip:

Include in your checklist opening the drain plug during periodic maintenance to drain condensed water from the motor.



## 18. New frame range with extended outputs.

The DIN EN50347 standard provides a table of ratings per frame size that manufacturers should comply with. However, it is limited to, for example, outputs up to 132kW and frame sizes up to 315, which means that beyond this manufacturers are not limited to a standard but to individual market practices.

In the W22 range WEG is introducing two new frames: 315L and 355A/B. With these new frames, the standard output offerings were distributed to accommodate 315L, 355M/L and 355A/B. In the table (right) 2 and 4 pole limits(\*) are shown:

| Frame  | 3000rpm     | 1500rpm     |
|--------|-------------|-------------|
| 315L   | Up to 250kW | Up to 250kW |
| 355M/L | Up to 315kW | Up to 355kW |

(\*) This limit corresponds to TEFC standard range. Tailor-made motors can reach higher outputs.

### Efficiency and Reliability Tip:

Please refer to W22 efficiency versions chapter to understand how to improve your overall process efficiency.





## 19. WISE insulation system: better materials for VSD capabilities.

The application of new technologies has become more and more widespread across all industry sectors resulting in many changes in how electric motors are applied and controlled. The use of VSD(\*) is recognised to be one of the major driving forces for energy efficiency because it can adjust motor output to best suit load requirements.

However, voltage spikes from the PWM waveform can have harmful effects on the motor winding, leading to premature failure

of the insulation system. This worsens as the switching frequency is increased.

W22 motors are fitted with WISE insulation (WEG Insulation System Evolution) which permits them to operate driven by VSD. The WISE is a system composed of: class H wire (200°C), enhanced insulation materials and a solvent-free resin.

(\*) Variable Speed Drives (also known as variable frequency drives (VFDs) or frequency converters)

### Efficiency and Reliability Tip:

Motors can operate driven by VSD without filters if the following conditions are respected:

| Motor rated voltage                  | Voltage peak on motor terminals (phase to phase) | dV/dt on motor terminals (phase to phase) | Rise time              | Time between pulses  |
|--------------------------------------|--|---|------------------------|----------------------|
| $V_n \leq 460 \text{ V}$             | 1600   | $\leq 5200 \text{ V}/\mu\text{s}$         | $\geq 0.1 \mu\text{s}$ | $\geq 6 \mu\text{s}$ |
| $460\text{V} < V_n \leq 575\text{V}$ | 1800   | $\leq 6500 \text{ V}/\mu\text{s}$         |                        |                      |
| $575\text{V} < V_n \leq 690\text{V}$ | 2200   | $\leq 7800 \text{ V}/\mu\text{s}$         |                        |                      |

1 – For the three cases above the maximum recommended switching frequency is limited to 5kHz.

2 – If one of the above conditions is not followed accordingly (including the switching frequency), a filter must be installed on VSD outlet.


**20. Flat efficiency curve: from 75% up to 100% of load the efficiency is kept constant for maximum energy saving.**

The pressure for a great sustainability approach in all kinds of industries associated with soaring energy costs have put energy efficient products in the spotlight. Additionally it is widely acknowledged that VSD can eliminate a large amount of wasted energy due to its ability of adapting motor output to load requirements.


The W22 motors play an important role in energy saving with regards to partial loads because their design allows for constant efficiency from 75% up to nominal load.

**Efficiency and Reliability Tip:**

Although efficiency is kept constant from 75% up to 100% of load, the dimensioning must always aim at positioning the motor very close to the optimum performance point, i.e. the rated point. This will guarantee that other performance values, such as power factor, are maximised.

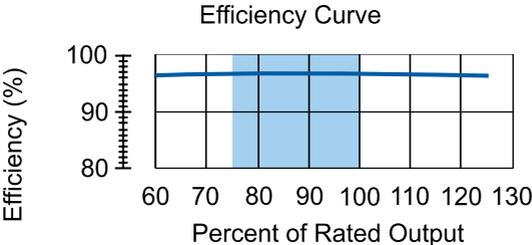

■ Constant efficiency area

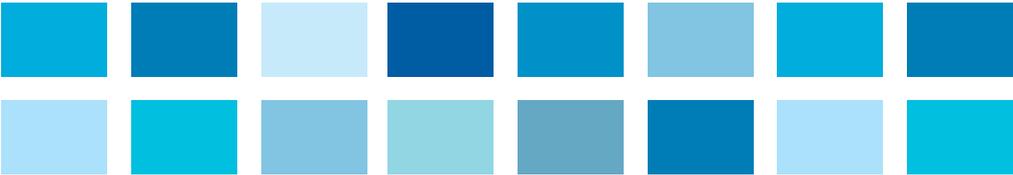

## 21. Premium Efficiency and Top Premium Efficiency designs exceeding the Minimum and Minimum High Efficiency Levels defined by AS/NZS1359.S:2004.

This standard proposes efficiency classes harmonisation amongst different practices throughout the world.

It defines two minimum efficiency classes, Minimum and Minimum High Efficiency Levels. The standard also defines that IEC 60034-2-1 must be used with regards to testing methods. The methods defined in this standard are recognised as being of lower uncertainty. Manufacturers must state in their documentation which method they use to determine the stray load losses, because they are not comparable if different methods are used.


W22 motors are available in two versions, exceeding the minimum levels established by MEPS. WEG is using the indirect method defined in IEC 60034-2-1 with stray load losses being determined from measurement.

### Efficiency and Reliability Tip:

The W22 motors were designed to exceed the requirements of MEPS efficiency levels. Being MEPS one of the highest efficiency requirement, and as WEG's W22 Top Premium Efficiency motors exceeds MEPS minimum high efficiency levels, these motors are among the most efficient motors in the entire world!

| W22 Top Premium E3 Plus |     |           |      |                   |      |                  |       |                 |  | CE |                                 | VOE 0830<br>IEC 60034 |  |
|-------------------------|-----|-----------|------|-------------------|------|------------------|-------|-----------------|--|----|---------------------------------|-----------------------|--|
| - [3] FRAME             |     | 225S/M    |      | IP66              |      | INS. CL. H       |       | [80 K]          |  |    |                                 |                       |  |
| N.                      | Aty | Hz        | kW   | min <sup>-1</sup> | A    |                  | COS φ |                 |  |    |                                 |                       |  |
| 380/660                 | 50  | 37        | 1475 | 66.5 / 39.4       | 0.87 |                  |       |                 |  |    |                                 |                       |  |
| 400/690                 | 50  | 37        | 1480 | 65.3 / 37.9       | 0.86 |                  |       |                 |  |    |                                 |                       |  |
| 415/-                   | 50  | 37        | 1480 | 63.9 / -          | 0.85 |                  |       |                 |  |    |                                 |                       |  |
| 440/-                   | 60  | 42        | 1775 | 66.3 / -          | 0.88 |                  |       |                 |  |    | POLYREX EM-ESSO<br>27 g 14000 h |                       |  |
| 460/-                   | 60  | 42        | 1780 | 64.1 / -          | 0.87 |                  |       |                 |  |    |                                 |                       |  |
| DUTY [S1]               |     | AMB. 40°C |      | SF [1.15]         |      | At [1000 m.s.s.] |       | WEIGHT [428 kg] |  |    |                                 |                       |  |

### Comparison between W22 and MEPS Efficiency levels

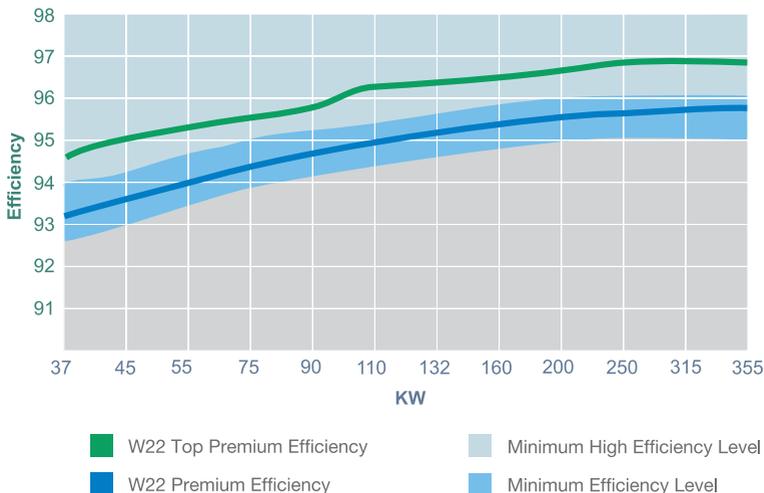



## 22. Top Premium Efficiency ratings in the same frame sizes as Premium Efficiency for complete interchangeability.

The W22 range is available in the two efficiency levels respecting the kW ratio per frame defined in EN 50347, which means that you can replace an Premium Efficiency E2 motor with a Top Premium Efficiency E3, in most cases, with total peace of mind.

### Efficiency and Reliability Tip:

The W22 design is WEG's answer to the global demands for increased energy efficiency. It also encompasses many performance advantages in terms of noise and vibration levels, extended lubrication intervals and flexibility. Please contact the nearest WEG office or distributor and get access to the future.



# WEG Worldwide Operations

## ARGENTINA

WEG EQUIPAMIENTOS ELECTRICOS S.A.  
(Headquarters San Francisco-Cordoba)  
Sgo. Pampiglione 4849  
Parque Industrial San Francisco  
2400 - San Francisco  
Phone(s): +54 (3564) 421484  
Fax: +54 (3564) 421459  
[info-ar@weg.net](mailto:info-ar@weg.net)  
[www.weg.net/ar](http://www.weg.net/ar)

## AUSTRALIA

WEG AUSTRALIA PTY. LTD.  
3 Dalmore Drive  
Carribean Park Industrial Estate  
Scoresby VIC 3179 - Melbourne  
Phone(s): 61 (3) 9765 4600  
Fax: 61 (3) 9753 2088  
[info-au@weg.net](mailto:info-au@weg.net)  
[www.weg.net/au](http://www.weg.net/au)

## BELGIUM

WEG BENELUX S.A.  
Rue de l'Industrie 30 D,  
1400 Nivelles  
Phone(s): +32 (67) 88-8420  
Fax: +32 (67) 84-1748  
[info-be@weg.net](mailto:info-be@weg.net)  
[www.weg.net/be](http://www.weg.net/be)

## CHILE

WEG CHILE S.A.  
Los Canteros 8600  
La Reina - Santiago  
Phone(s): (56-2) 784 8900  
Fax: (56-2) 784 8950  
[info-cl@weg.net](mailto:info-cl@weg.net)  
[www.weg.net/cl](http://www.weg.net/cl)

## CHINA

WEG (NANTONG) ELECTRIC  
MOTOR MANUFACTURING CO.,  
LTD.  
No. 128# - Xinkai South Road,  
Nantong Economic &  
Technical Development Zone,  
Nantong, Jiangsu Province.  
Phone(s): (86) 0513-85989333  
Fax: (86) 0513-85922161  
[info-cn@weg.net](mailto:info-cn@weg.net)  
[www.weg.net/cn](http://www.weg.net/cn)

## COLOMBIA

WEG COLOMBIA LTDA  
Calle 46A N82 - 54  
Porteria II - Bodega 7 - San  
Cayetano II - Bogotá  
Phone(s): (57 1) 416 0166  
Fax: (57 1) 416 2077  
[info-co@weg.net](mailto:info-co@weg.net)  
[www.weg.net/co](http://www.weg.net/co)

## FRANCE

WEG FRANCE SAS  
ZI de Chenes - Le Loup  
13 Rue du Moreillon - BP 738  
38297 Saint Quentin Fallavier  
Phone(s): +33 (0) 4 74 99 11 35  
Fax: +33 (0) 4 74 99 11 44  
[info-fr@weg.net](mailto:info-fr@weg.net)  
[www.weg.net/fr](http://www.weg.net/fr)

## GERMANY

WEG GERMANY GmbH  
Industriegebiet Türnich 3  
Geigerstraße 7  
50169 Kerpen-Türnich  
Phone(s): +49 (0)2237/9291-0  
Fax: +49 (0)2237/9292-200  
[info-de@weg.net](mailto:info-de@weg.net)  
[www.weg.net/de](http://www.weg.net/de)

## INDIA

WEG Electric (India) Pvt. Ltd.  
#38, Ground Floor, 1st Main  
Road, Lower Palace Orchards,  
Bangalore - 560 003  
Phone(s): +91-80-4128 2007  
+91-80-4128 2006  
Fax: +91-80-2336 7624  
[info-in@weg.net](mailto:info-in@weg.net)  
[www.weg.net/in](http://www.weg.net/in)

## ITALY

WEG ITALIA S.R.L.  
V.le Brianza 20 - 20092 - Cinise-  
llo  
Balsamo - Milano  
Phone(s): (39) 02 6129-3535  
Fax: (39) 02 6601-3738  
[info-it@weg.net](mailto:info-it@weg.net)  
[www.weg.net/it](http://www.weg.net/it)

## JAPAN

WEG ELECTRIC MOTORS  
JAPAN CO., LTD.  
Yokohama Sky Building 20F,  
2-19-12 Takashima,  
Nishi-ku, Yokohama City,  
Kanagawa, Japan 220-001  
Phone: (81) 45 440 6063  
[info-jp@weg.net](mailto:info-jp@weg.net)  
[www.weg.net/jp](http://www.weg.net/jp)

## MEXICO

WEG MEXICO, S.A. DE C.V.  
Carretera Jorobas-Tula Km. 3.5,  
Manzana 5, Lote 1  
Fraccionamiento Parque  
Industrial - Huehuetoca,  
Estado de México - C.P. 54680  
Phone(s): +52 (55) 5321 4275  
Fax: +52 (55) 5321 4262  
[info-mx@weg.net](mailto:info-mx@weg.net)  
[www.weg.net/mx](http://www.weg.net/mx)

## NETHERLANDS

WEG NETHERLANDS  
Sales Office of  
WEG Benelux S.A.  
Hanzepoort 23C  
7575 DE Oldenzaal  
Phone(s): +31 (0) 541-571080  
Fax: +31 (0) 541-571090  
[info-nl@weg.net](mailto:info-nl@weg.net)  
[www.weg.net/nl](http://www.weg.net/nl)

## PORTUGAL

WEG EURO - INDÚSTRIA  
ELÉCTRICA, S.A.  
Rua Eng. Frederico Ulrich  
Apartado 6074  
4476-908 - Maia  
Phone(s): +351 229 477 705  
Fax: +351 229 477 792  
[info-pt@weg.net](mailto:info-pt@weg.net)  
[www.weg.net/pt](http://www.weg.net/pt)

## RUSSIA

WEG RUSSIA  
Pochainskaya Str. 17  
Nizhny Novgorod  
603001 - Russia  
Phone(s): +7-831-2780425  
Fax: +7-831-2780424  
[info-ru@weg.net](mailto:info-ru@weg.net)  
[www.weg.net/ru](http://www.weg.net/ru)

## SPAIN

WEG IBERIA S.L.  
Avenida de la Industria,25  
28823 Coslada - Madrid  
Phone(s): (34) 916 553 008  
Fax: (34) 916 553 058  
[info-es@weg.net](mailto:info-es@weg.net)  
[www.weg.net/es](http://www.weg.net/es)

## SINGAPORE

WEG SINGAPORE PTE LTD  
159, Kampong Ampat,  
#06-02A KA PLACE.  
Singapore 368328.  
Phone(s): +65 6858 9081  
Fax: +65 6858 1081  
[info-sg@weg.net](mailto:info-sg@weg.net)  
[www.weg.net/sg](http://www.weg.net/sg)

## SWEDEN

WEG SCANDINAVIA AB  
Box 10196  
Verkstadgatan 9  
434 22 Kungsbacka  
Phone(s): (46) 300 73400  
Fax: (46) 300 70264  
[info-se@weg.net](mailto:info-se@weg.net)  
[www.weg.net/se](http://www.weg.net/se)

## UK

WEG ELECTRIC  
MOTORS (U.K.) LTD.  
28/29 Walkers Road  
Manorside Industrial Estate  
North Moons Moat - Redditch  
Worcestershire B98 9HE  
Phone(s): 44 (0)1527 596-748  
Fax: 44 (0)1527 591-133  
[info-uk@weg.net](mailto:info-uk@weg.net)  
[www.weg.net/uk](http://www.weg.net/uk)

## UNITED ARAB EMIRATES

WEG MIDDLE EAST FZE  
JAFZA - JEBEL ALI FREE  
ZONE  
Tower 18, 19th Floor,  
Office LB 18 1905  
P.O. Box 262508 - Dubai  
Phone: +971 (4) 8130800  
Fax: +971 (4) 8130811  
[info-ae@weg.net](mailto:info-ae@weg.net)  
[www.weg.net/ae](http://www.weg.net/ae)

## USA

WEG ELECTRIC CORP.  
6655 Sugarloaf Parkway,  
Duluth, GA 30097  
Phone(s): 1-678-249-2000  
Fax: 1-770-338-1632  
[info-us@weg.net](mailto:info-us@weg.net)  
[www.weg.net/us](http://www.weg.net/us)

## VENEZUELA

WEG INDUSTRIAS VENEZUELA  
C.A.  
Avenida 138-A  
Edificio Torre Banco Occidental  
de Descuento, Piso 6 Oficina 6-12  
Urbanizacion San Jose de  
Tarbes  
Zona Postal 2001  
Valencia, Edo. Carabobo  
Phone(s): (58) 241 8210582  
(58) 241 8210799  
(58) 241 8211457  
Fax: (58) 241 8210966  
[info-ve@weg.net](mailto:info-ve@weg.net)  
[www.weg.net/ve](http://www.weg.net/ve)



WEG Equipamentos Elétricos S.A.  
International Division  
Av. Prefeito Waldemar Grubba, 3000  
89256-900 - Jaraguá do Sul - SC - Brazil  
Phone: 55 (47) 3276-4002  
Fax: 55 (47) 3276-4060  
[www.weg.net](http://www.weg.net)

